




HYDRAFORM

THE LEADING ALTERNATIVE BUILDING TECHNOLOGY, **SINCE 1988**



PRODUCTION:

UP TO 2200 BLOCKS
PER 8 HOUR DAY
UP TO 12-15 X 50M² HOUSES
PER MONTH
*** INCREASE PRODUCTION**
UP TO 3000 BLOCKS PER
DAY WITH AUTOMATION



DESCRIPTION:

MACHINE SUPPLIED WITH A 150MM, 180MM OR 220MM WIDE INTERLOCKING MOULD OF YOUR CHOICE. OTHER MOULDS ARE AVAILABLE AS PER THE HYDRAFORM PRODUCT LIST.



PROJECT TYPE:

START-UP/DIY PROJECT
MEDIUM - LARGE PROJECTS



ESTIMATED MACHINE DIMENSION:

LENGTH/WIDTH/HEIGHT CM -
302/172/164 (ELEC / DIESEL)
CUBIC METER- 8,519 (ELEC / DIESEL)
ESTIMATED WEIGHT - 1600

✓ THE M7M1*

SUPER HYDRAFORM BLOCKMAKING MACHINE




- **Features:** Integreated pan mixer, mobile, road tyres and tow hitch
- **Operating staff:** ± 5 - 8
- **Power source:** 13 HP Diesel engine, diesel consumption 2.5 litre/hour or Electric Three Phase 380Volt- 15 kW

RECOMMENDED SPARES/ACCESSORIES FOR OPTIMUM PRODUCTION:

- Block cutter | Block tester | Wearplates | Hydraulic filter | Pan Mixer Blades | RCB (Reinforced concrete beam) Mould
- **Optional accessory products offered by Hydraform available on:**
<https://www.hydraform.com/products/accessories/>

LEADERS IN ENVIRONMENTAL SUSTAINABILITY

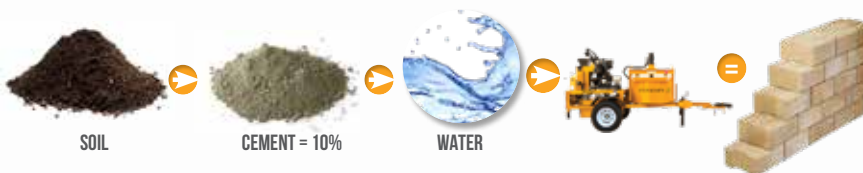



INTERLOCKING BLOCK RANGE

| BLOCK | DESCRIPTION | BLOCK APPLICATION |
|---|---|---|
| HYDRAFORM 220MM CONDUIT BLOCK | | |
|  | <p>Recommended for seismic regions as per engineers specifications.</p> <ul style="list-style-type: none"> No mortar Interlocking Horizontal cavity for rebar, cables or piping. <p>Dimensions are W220 x H115 x L230mm</p> |  |
| HYDRAFORM 180MM CONDUIT BLOCK | | |
|  | <p>Recommended for single story construction as per engineers specifications.</p> <ul style="list-style-type: none"> No mortar Interlocking Horizontal- cavity for cables and piping <p>Dimensions are W180 x H115 x L230mm</p> |  |
| HYDRAFORM 150MM CONDUIT BLOCK | | |
|  | <p>Recommended for single story construction as per engineers' specifications. Infill between concrete or steel columns.</p> <ul style="list-style-type: none"> No mortar Interlocking Horizontal cavity for rebar, cables or piping. <p>Dimension are W150 x H115 x L230mm</p> |  |
| HYDRAFORM 140MM SEMI DRY-STACK BLOCK | | |
|  | <p>Mainly for internal walls and infill. Can also be used for small single-story constructions as per engineer's specification.</p> <ul style="list-style-type: none"> Semi dry-stack Cement slurry between blocks <p>Dimensions are W140 x H115 x L230mm</p> |  |
| HYDRAFORM CORNER LONG BLOCK (1 BLOCK AND A HALF) | | |
|  | <p>Long block, can be made with any mould by double loading the chamber</p> <ul style="list-style-type: none"> Used to start the corner of your wall construction. Daily production should be 10% of the full block production (100 corner long blocks for every 1000 normal blocks) <p>Dimensions are 180, 150, 140 x H115 x L280mm</p> |  |
| HYDRAFORM CAPPING 220MM BLOCK | | |
|  | <p>Recommended for boundary wall finishing and window sills.</p> <p>Dimensions are W220 x H115 x L230mm</p> |  |